

# OPTIC MOUNTS & RINGS

WHAT IT TAKES TO  
STAY ZEROED.

There is a lot more involved in staying zeroed that goes well beyond simply torquing down some screws. Surface interfaces must adhere to strict tolerances, thread engagement must be clean and precise to prevent cross-threading, mounts must be squared, and locking lugs must be able to return to zero and handle recoil report. Our vast array of optic mounts & rings checks all the boxes from simple adaptors, drilled and tapped receiver mounts, quick release integral mounts, to our legendary UTG PRO® Precision Optics Interface (P.O.I.®) scope rings.

## JUMP TO A SERIES

### SCOPE RINGS & MOUNTS

UTG PRO® P.O.I.® Scope Rings	068
ACCU-SYNC® QR Scope Rings	070
ACCU-SYNC® QR Cantilever Mounts	072
ACCU-SYNC® Cantilever Scope Rings & Mounts	073
UTG® Scope Rings & Mounts	074

### DOVETAIL-TO-PICATINNY MOUNTS

076

### DRILLED & TAPPED RECEIVER MOUNTS

077

### SHOTGUN SIDE SADDLE MOUNTS

077

### DEDICATED OPTIC MOUNTS

FOR UTG® OP3 MICRO	079
FOR TRIJICON® RMR	081
FOR AIMPOINT® T1	081
FOR TRIJICON® MRO	081

### AK RECEIVER MOUNTS

082

### PICATINNY RISERS

083

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)





# Precision Optics Interface®



RATED UP TO  
.50 BMG

## P.O.I.® SCOPE RINGS | PRECISION OPTICS INTERFACE



**LOW PROFILE**  
1 inch / RWU012510  
30 mm / RWU013010

**PICATINNY**  
**MEDIUM PROFILE**  
1 inch / RWU012515  
30 mm / RWU013015  
34 mm / RWU013415

**HIGH PROFILE**  
1 inch / RWU012520  
30 mm / RWU013022  
34 mm / RWU013420

**LOW PROFILE**  
1 inch / RDU013010

**DOVETAIL**  
**MEDIUM PROFILE**  
1 inch / RDU012515  
30 mm / RDU013015

**HIGH PROFILE**  
1 inch / RDU012520  
30 mm / RDU013022

**UTG PRO** 

### P.O.I.® SCOPE RINGS | PRECISION OPTICS INTERFACE

- » Progressively Machined Inner Diameter for a Precise and Seamless Ring-to-Scope Interface
- » Low Profile and Flush-fitting Locking Side Plate Features Dual Spring-loaded Guides Ensuring a Secure and Repeatable Zero
- » Integral Squared Recoil Stops Eliminate Possibility of Forward and Rearward Movement Under Recoil
- » Rated up to .50 BMG
- » US PAT. D771218, EU PAT. 002761064-0001

	RWU012510	RWU012515	RWU012520	RWU013010	RWU013015	RWU013022	RWU013415	RWU013420	RDU012515	RDU012520	RDU013010	RDU013015	RDU013022
Ring Type	Picatinny Scope Rings (set of 2)								Dovetail Scope Rings (set of 2)				
Ring Diameter	1"	1"	1"	30 mm	30 mm	30 mm	34 mm	34 mm	1"	1"	30 mm	30 mm	30 mm
Profile	Low	Medium	High	Low	Medium	High	Medium	High	Medium	High	Low	Medium	High
Max. Scope Outer Dia.	45 mm	55 mm	65 mm	49 mm	59 mm	73 mm	63 mm	73 mm	55 mm	65 mm	49 mm	59 mm	73 mm
Center Height	23 mm	28 mm	33 mm	25 mm	30 mm	37 mm	32 mm	37 mm	28 mm	33 mm	25 mm	30 mm	37 mm
Saddle Height	10 mm	15 mm	20 mm	10 mm	15 mm	22 mm	15 mm	20 mm	15 mm	20 mm	10 mm	15 mm	22 mm
Ring Width	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm





ACCURACY SYNCHRONIZED QUICK RELEASE  
**ACCU-SYNC® QR**

## ACCU-SYNC® QR SCOPE RINGS



**LOW PROFILE**  
 1 inch / AQR110  
 30 mm / AQR310

**MEDIUM PROFILE**  
 1 inch / AQR115  
 30 mm / AQR315  
 34 mm / AQR415

**PICATINNY HIGH PROFILE**  
 1 inch / AQR120  
 30 mm / AQR322  
 34 mm / AQR420

**X-HIGH PROFILE**  
 34 mm / AQR422

**2X-HIGH PROFILE**  
 34 mm / AQR432

### ACCU-SYNC® QR SCOPE RINGS

- » Tool-free and Wide-Range Tension Adjustment
- » Accommodates Even Most Out-of-spec Picatinny Rails
- » Locking Quick Release Throw Levers Prevent Inadvertent Release
- » Rated for .338 LAPUA Magnum
- » Squared Recoil Stops Prevent Forward and Rearward Movement under Recoil
- » Snag-free Radiused Edges and Corners and Melted Contours
- » Lightweight Skeletonized Matte Black Anodized Aluminum Construction

	AQR110	AQR115	AQR120	AQR310	AQR315	AQR322	AQR415	AQR420	AQR422	AQR432
Ring Type	Picatinny Rings (set of 2)									
Ring Diameter	1"	1"	1"	30 mm	30 mm	30 mm	34 mm	34 mm	34 mm	34 mm
Profile	Low	Medium	High	Low	Medium	High	Medium	High	X-High	2X-High
Max. Scope Outer Dia.	45.4 mm	55.4 mm	65.4 mm	50 mm	60 mm	74 mm	64 mm	74 mm	98 mm	98 mm
Center Height	22.7 mm	27.7 mm	32.7 mm	25 mm	30 mm	37 mm	32 mm	37 mm	39 mm	49 mm
Saddle Height	10 mm	15 mm	20 mm	10 mm	15 mm	22 mm	15 mm	20 mm	22 mm	32 mm
Ring Width	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm





# ACCU-SYNC® QR CANTILEVER MOUNTS

## ACCU-SYNC® QR CANTILEVER MOUNTS

- » Tool-free and Wide-Range Tension Adjustment
- » Accommodates Even Most Out-of-spec Picatinny Rails
- » Locking Quick Release Throw Levers Prevent Inadvertent Release
- » Rated for .338 LAPUA Magnum
- » Squared Recoil Stops Prevent Forward and Rearward Movement under Recoil
- » Snag-free Radiused Edges and Corners and Melted Contours
- » Lightweight Skeletonized Matte Black Anodized Aluminum Construction



**MEDIUM PROFILE**  
1 inch / AIR11834Q  
1 inch / AIR11850Q

**PICATINNY HIGH PROFILE**  
1 inch / AIR12250Q  
30 mm / AIR32234Q  
30 mm / AIR32250Q

**X-HIGH PROFILE**  
34 mm / AIR42270Q



## ACCU-SYNC® ANTI-CANT LEVELERS

- » Magnetic Flip-to-Side Anti-Cant Bubble Leveler Easily Seen Through Peripherals without having to Break Target Focus and/or Adjust Cheek Weld
- » Durable Matte Black Anodized 6061-T6 Aluminum Construction
- » Compatible with UTG® ACCU-SYNC® Cantilever Mounts and Rings that Feature a Mechanical Offset
- » US PAT. 1129372

1 inch / MT-RTR1  
30 mm / MT-RTR3  
34 mm / MT-RTR4



## ACCU-SYNC® ANTI-CANT LEVELERS & MRDS MOUNTS

- » Magnetic Flip-to-Side Anti-Cant Bubble Leveler Easily Seen Through Peripherals without having to Break Target Focus and/or Adjust Cheek Weld
- » Durable Matte Black Anodized 6061-T6 Aluminum Construction
- » Compatible with UTG® ACCU-SYNC® Cantilever Mounts and Rings that Feature a Mechanical Offset
- » Includes Cover Plate and DOCTER® and RMR® Footprint Compatible Optic Plates
- » US PAT. 1129372

1 inch with MRDS Mounts / MT-RTF1  
30 mm with MRDS Mounts / MT-RTF3  
34 mm with MRDS Mounts / MT-RTF4

# ACCU-SYNC® CANTILEVER RINGS & MOUNTS



## PICATINNY CANTILEVER MOUNTS

**MEDIUM PROFILE**  
1 inch / AIR11834  
1 inch / AIR11850  
30 mm / AIR31834  
30 mm / AIR31850

**HIGH PROFILE**  
1 inch / AIR12234  
1 inch / AIR12250  
30 mm / AIR32234  
30 mm / AIR32250  
34 mm / AIR42250



## PICATINNY CANTILEVER SCOPE RINGS

**HIGH PROFILE**  
1 inch / AIR122S  
30 mm / AIR322S  
34 mm / AIR422S

QR Matte Black	AIR11834Q	AIR11850Q		AIR12250Q			AIR32234Q	AIR32250Q		AIR42270Q			
Matte Black	AIR11834	AIR11850	AIR12234	AIR12250	AIR31834	AIR31850	AIR32234	AIR32250	AIR42250		AIR122S	AIR322S	AIR422S
AB=Matte Blue	AIR11834AB		AIR12234AB	AIR12250AB	AIR31834AB	AIR31850AB		AIR32250AB	AIR42250AB		AIR122SAB		
AR=Matte Red	AIR11834AR	AIR11850AR	AIR12234AR	AIR12250AR	AIR31834AR	AIR31850AR	AIR32234AR					AIR322SAR	AIR422SAR
Ring Type	Picatinny Cantilever Mount										Cantilever Scope Rings		
Ring Diameter	1"	1"	1"	1"	30 mm	30 mm	30 mm	30 mm	34 mm	34 mm	1"	30 mm	34 mm
Profile	Medium	Medium	High	High	Medium	Medium	High	High	High	X-High	High	High	High
Max. Scope Outer Dia.	61 mm	61 mm	69 mm	69 mm	65 mm	65 mm	73 mm	73 mm	77 mm	78 mm	69 mm	73 mm	77 mm
Center Height	31 mm	31 mm	35 mm	35 mm	33 mm	33 mm	37 mm	37 mm	39 mm	39 mm	35 mm	37 mm	39 mm
Saddle Height	18 mm	18 mm	22 mm	22 mm	18 mm	18 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm	22 mm
Ring Width	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm	25 mm
Ring Distance	44 mm	60 mm	44 mm	60 mm	44 mm	60 mm	44 mm	60 mm	60 mm	60 mm	N/A	N/A	N/A
Integral Base Length	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	80 mm	32 mm	32 mm
Offset Distance	34 mm	50 mm	34 mm	50 mm	34 mm	50 mm	34 mm	50 mm	50 mm	70 mm	37 mm	37 mm	37 mm



# UTG® SCOPE RINGS & MOUNTS



**PICATINNY**  
**LOW PROFILE**  
 1 inch / RG2W1104  
 30 mm / RG2W3104



**PICATINNY**  
**MEDIUM PROFILE**  
 1 inch / RG2W1154  
 30 mm / RG2W3154



**PICATINNY**  
**HIGH PROFILE**  
 1 inch / RG2W1204  
 30 mm / RG2W3224



**DOVETAIL**  
**MEDIUM PROFILE**  
 1 inch / RGPM-25M4  
 30 mm / RGPM-30M4  
 1 inch / RGPM2PA-25M4  
 30 mm / RGPM2PA-30M4

**DOVETAIL**  
**HIGH PROFILE**  
 1 inch / RGPM-25H4  
 30 mm / RGPM-30H4  
 1 inch / RGPM2PA-25H4  
 30 mm / RGPM2PA-30H4  
 1 inch / RGPMOFS38-25H4

	RG2W1104	RG2W1154	RG2W1204	RG2W3104	RG2W3154	RG2W3224
Ring Type	QD Twist Lock Picatinny Scope Rings (set of 2)					
Ring Diameter	1"	1"	1"	30 mm	30 mm	30 mm
Profile	Low	Medium	High	Low	Medium	High
Max. Scope Outer Dia.	45 mm	55 mm	65 mm	49 mm	59 mm	73 mm
Center Height	23 mm	28 mm	33 mm	25 mm	30 mm	37 mm
Saddle Height	10 mm	15 mm	20 mm	10 mm	15 mm	22 mm
Ring Width	18 mm	22 mm	22 mm	22 mm	22 mm	22 mm

	RGWM-25L2	RGWM-25M4	RGWM-25H4	RGWM-30L4	RGWM-30M4	RGWM-30H4
Ring Type	Picatinny Scope Rings (set of 2)					
Ring Diameter	1"	1"	1"	30 mm	30 mm	30 mm
Profile	Low	Medium	High	Low	Medium	High
Max. Scope Outer Dia.	45 mm	53 mm	61 mm	47 mm	57 mm	73 mm
Center Height	23 mm	27 mm	31 mm	24 mm	29 mm	37 mm
Saddle Height	10 mm	14 mm	18 mm	9 mm	14 mm	22 mm
Ring Width	16 mm	21 mm	21 mm	21 mm	21 mm	21 mm

	RGPM-25M4	RGPM-25H4	RGPM-30M4	RGPM-30H4	RGPM2PA-25M4	RGPM2PA-25H4	RGPM2PA-30M4	RGPM2PA-30H4	RGPMOFS38-25H4
Ring Type	Dovetail Scope Rings (set of 2)				Dovetail Scope Ring Mounts				
Ring Diameter	1"	1"	30 mm	30 mm	1"	1"	30 mm	30 mm	1"
Profile	Medium	High	Medium	High	Medium	High	Medium	High	High
Max. Scope Outer Dia.	53 mm	67 mm	57 mm	71 mm	53 mm	67 mm	57 mm	71 mm	67 mm
Center Height	27 mm	34 mm	29 mm	36 mm	27 mm	34 mm	29 mm	36 mm	34 mm
Saddle Height	14 mm	21 mm	14 mm	21 mm	14 mm	21 mm	14 mm	21 mm	21 mm
Ring Width	21 mm	21 mm	21 mm	21 mm	21 mm	21 mm	21 mm	21 mm	21 mm
Ring Distance	N/A	N/A	N/A	N/A	58 mm	58 mm	58 mm	58 mm	39 mm
Integral Base Length	N/A	N/A	N/A	N/A	100 mm	100 mm	100 mm	100 mm	62 mm
Offset Distance	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	38 mm





## DOVETAIL TO PICATINNY MOUNTS



### DOVETAIL TO PICATINNY ADAPTOR MOUNT

- » Precision Machined from Aircraft Aluminum with a Matte Black Finish
- » 3.94" Scalloped 9 Slot Picatinny Rail with 0.59" Saddle Height
- » Compatible with Flat Receivers Equipped with 9mm-11mm Dovetail Rails
- » US PAT. D837330

■ / MNT-PMTOWL-A



### COMPENSATION MOUNT FOR RWS DIANA AIR RIFLES

- » Precision Machined from Aircraft Aluminum with a Matte Black Finish
- » Compensation to Bring the POI (Point Of Impact) Up 10 Inches at 30 Yards

■ / MNT-DNT06



### UNIVERSAL DOVETAIL TO PICATINNY ADAPTOR

- » Precision Machined from Aircraft Aluminum with a Matte Black Finish
- » Compatible with 9mm - 11mm Flat or Rounded Dovetail Rails
- » US PAT. 10352656, EU PAT. EP3196588

■ / MNT-DTW145



### DOVETAIL-TO-PICATINNY SNAP-IN RAIL ADAPTOR

- » Converts Picatinny Mounts and Accessories to Dovetail
- » Spring-loaded Self-adjusting Width with Removable Stop Pin for Added Retention
- » Reliable Aluminum and Steel Construction
- » US PAT. 8752325, EU PAT. EP3196588

■ / MNT-DT2PW01 (Set Of 2)

## DRILLED & TAPPED RECEIVER MOUNTS



### OPTIC MOUNT FOR REMINGTON® 870™

- » Precision Machined from Aircraft Aluminum with a Matte Black Hard Coat Anodize
- » 6.1" Length with 14 Picatinny Slots
- » Low Profile with See Thru Design for Use of Front Bead Sight
- » Compatible with REMINGTON® 870™/1100™ with Drilled and Tapped Receiver

■ / MTU028SG



### OPTIC MOUNT FOR REMINGTON® 700®

- » Solid Steel Construction
- » Clearance Cut for Reliable Case Ejection

For REMINGTON® 700® Long Action Rifles / ■ / MNT-RM700

For REMINGTON® 700® Short Action Rifles / ■ / MNT-RM700S



### OPTIC MOUNT FOR MOSSBERG® 500®

- » Precision Machined from Aircraft Aluminum with a Matte Black Hard Coat Anodize
- » 5.5" Length with 13 Picatinny Slots
- » Low Profile See Thru Design Allows Use of Front Sight Bead
- » Compatible with MOSSBERG® Model 500® with Drilled and Tapped Receiver

■ / MTU029SG  
■ / MNT-MB500T (Overseas Version)



### OPTIC MOUNT FOR RUGER® 10/22®

- » Precision Machined from Aircraft Aluminum with a Matte Black Hard Coat Anodize
- » 4.67" Length with 11 Picatinny Slots
- » Low Profile Design with U-cut for Weight Reduction
- » Compatible with RUGER® 10/22® with Drilled and Tapped Receiver

■ / MTU030T22

## SHOTGUN SIDE SADDLE MOUNTS



### OPTIC MOUNT FOR MOSSBERG® 500® / 590® / 590M®

- » Durable 6061-T6 Aluminum Construction Finished in a Matte Black Anodization
- » Removable 4-Capacity Shot Shell Carrier Included
- » MT-MB590: Compatible with 12 Gauge MOSSBERG® 500®/590® Shotguns
- » MT-MB590M: Compatible with 12 Gauge MOSSBERG® 590M® Mag-Fed Shotguns

For MOSSBERG® 500® / 590® / ■ / MT-MB590  
For MOSSBERG® 590M® ■ / MT-MB590M



### OPTIC MOUNT FOR REMINGTON® 870™

- » Durable 6061-T6 Aluminum Construction Finished in a Matte Black Anodization
- » Removable 4-Capacity Shot Shell Carrier Included
- » Compatible with 12 Gauge REMINGTON® 870™ and 870 DM Shotguns with up to a 3.5" Chambering

■ / MT-RM870



# DEDICATED OPTIC MOUNTS FOR OP3 MICRO

\* Excludes OP3 Mini MICRO with RMSC Footprint \*



## LOW PROFILE DOVETAIL MOUNT

Dovetail /  
0.33" Saddle Height / RDM-20XSD



## 45° ANGLE MOUNT

Picatinny /  
RDM-2045



## ABSOLUTE CO-WITNESS MOUNT

Picatinny /  
0.78" Saddle Height / RDM-20AC



## REAR SIGHT MOUNTS

For GLOCK® Dovetail /  
0.15" Saddle Height / RDM-20GL




## REAR SIGHT MOUNTS

For Sig P-Series Dovetail /  
0.16" Saddle Height / RDM-20SIG



## REAR SIGHT MOUNTS

For S&W M&P® Dovetail /  
0.16" Saddle Height / RDM-20SW

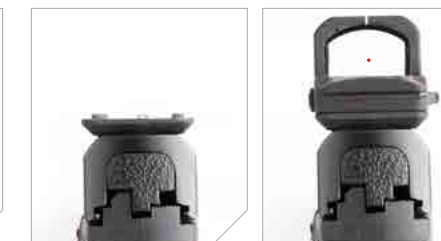

### OP3 MICRO MOUNTS

	RDM-20XSD	RDM-2045	RDM-20AC	RDM-20GL	RDM-20SIG	RDM-20SW
Length / Width	1.8" / 1.1"	1.8" / 2.5"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"
Saddle Height	0.3"	N/A	0.78"	0.15"	0.16"	0.16"
Weight	21.3 oz	1.5 oz	1.5 oz	0.5 oz	0.5 oz	0.5 oz

## OP3 MICRO MRDS

\* Refer to P. 062 - P. 063 for More Info



**OP3 MINI MICRO**  
Constant-on Automatic Brightness  
SHIELD RMSC Footprint / Red 3 MOA / OT-RDM16R



**OP3 MICRO**  
Manual Brightness  
DOCTER® Footprint / Red 4 MOA / OP-RDM20R  
DOCTER® Footprint / Green 4 MOA / OP-RDM20G  
RMR® Footprint / Red 4 MOA / OP-RMR20R



**OP3 MICRO SL**  
Side Loading Battery / Manual Brightness  
DOCTER® Footprint / Red 4 MOA / OP-RDM20CT

**OP3 MICRO SLS**  
Side Loading Battery / Manual & Auto Sensing Brightness  
DOCTER® Footprint / Red 4 MOA / OP-RDM20CTS  
RMR® Footprint / Red 4 MOA / OP-RMR20CTS





# DEDICATED OPTIC MOUNTS FOR RMR® /T1 / MRO®

## FOR TRIJICON RMR®



**45° ANGLED MOUNT**  
Picatinny /  
MT-RMR45



**LOWER 1/3 CO-WITNESS MOUNT**  
Picatinny /  
0.95" Saddle Height / MT-RMR13C



**ABSOLUTE CO-WITNESS MOUNT**  
Picatinny /  
0.87" Saddle Height / MT-RMRAC




**2-IN-1 COMBO**  
/ MT-RMRKIT



**LOW PROFILE MOUNT**  
Picatinny /  
0.40" Saddle Height / MT-RMRXS



**REAR SIGHT MOUNT**  
For GLOCK® Dovetail  
/ 0.15" Saddle Height / MT-RMRGL

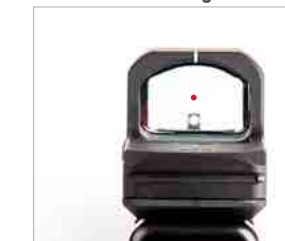

## FOR AIMPOINT® T1



**ABSOLUTE CO-WITNESS MOUNT**  
Picatinny /  
0.78" Saddle Height / MT-T1AC



**LOWER 1/3 CO-WITNESS MOUNT**  
Picatinny /  
1.04" Saddle Height / MT-T113C



**LOWER 1/3 CO-WITNESS MOUNT**  
Picatinny /  
0.76" Saddle Height / MT-MRO13C



**ABSOLUTE CO-WITNESS MOUNT**  
Picatinny /  
0.65" Saddle Height / MT-MROAC



**LOW PROFILE MOUNT**  
Picatinny /  
0.20" Saddle Height / MT-MROXS



	MT-RMR45	MT-RMR13C	MT-RMRKIT		MT-RMRGL	MT-T1AC	MT-T113C	MT-MROAC	MT-MRO13C	MT-MROXS
			MT-RMRAC	MT-RMRXS						
Length / Width	1.8" / 2.5"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.9" / 1.2"	1.9" / 1.2"	1.5" / 1.2"	1.5" / 1.2"	1.5" / 1.2"
Saddle Height	N/A	0.95"	0.87"	0.40"	0.16"	0.78"	1.04"	0.65"	0.76"	0.20"
Weight	1.4 oz	1.6 oz	1.5 oz	1.4 oz	0.4 oz	1.2 oz	1.3 oz	0.9 oz	0.9 oz	0.6 oz





# AK RECEIVER MOUNTS



### AK ACCU-SYNC® QUICK RELEASE SIDE MOUNT

- » Matte Black Anodized Steel-reinforced 6061-T6 Aluminum Construction
- » Tool-free, Tension-adjustable Steel Quick Release (QR) Lever Mount Compatible with Most Standard Receiver Side Rails
- » Universal, 16-slot Picatinny Top Rail, Centering with Receiver May Vary Depending on Make and Model and Manufacturing Tolerances
- » Overall Lightweight Design Features 2 Side M-LOK® Slots for Attaching Accessories
- » US PAT. D949276, US PAT. D949277

■ / MT-UAK01



### AK QUICK DETACH SIDE MOUNT FOR ZASTAVA M70 N-PAP

- » Designed for the Zastava M70 N-PAP
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Adjustable Quick-detach Lever Mount
- » Scalloped 15 Slot Picatinny Rail Features a Deep U-cut Channel for Accessing Iron Sights
- » Overall Lightweight Design Features 2 Side M-LOK® Slots for Attaching Accessories
- » US PAT. D949276, US PAT. D949277

■ / MT-ZAK01



UTG PRO®

### AK QUICK DETACH SIDE MOUNT

- » Proudly Designed and Made in USA with a Lifetime Warranty
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Lightweight Design with Deep U-Cut Channel for Accessing Iron Sights
- » 16 Slot Picatinny Top Rail with Detachable 6 Slot Side Rail
- » Tension Adjustable Quick Detach Lever Mount

■ / MTU016



### AK STEEL SIDE PLATE

- » Durable Steel Construction with a Matte Black Finish
- » Fits Both Milled and Stamped AK Receivers and Accepts a Wide Variety of Side Optic Mounts
- » Permanent Modification Required


■ / TL-M47SR

# PICATINNY RISERS



0.5 INCH

3-slot / MT-RSX5S  
13-slot / MT-RSX5L




US PAT. D784482



0.75 INCH

3-slot / MT-RSX7S  
13-slot / MT-RSX7L




US PAT. D784483




0.83 INCH

3-slot / MT-RSX8S  
13-slot / MT-RSX8L



1 INCH

3-slot / MT-RSX1S  
13-slot / MT-RSX1L1



US PAT. D784481



### 20 MOA ELEVATED PICATINNY MOUNT

13-slot / MT-RSX20MOA

## SUPER SLIM PICATINNY RISER MOUNTS

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Lightweight and Low Profile with Dehorned Corners and Melted Contours
- » Laser Engraved T-marked MIL-STD-1913 Picatinny Rail
- » Squared Integral Recoil Stops for a Secure and Repeatable Zero Hold
- » Significant Lightening Cuts Reduce Overall Weight and Bulk (Medium and High Profile Only)

	MT-RSX5S	MT-RSX7S	MT-RSX8S	MT-RSX1S	MT-RSX5L	MT-RSX7L	MT-RSX8L	MT-RSX1L	MT-RSX20MOA
Length	1.6"	1.6"	1.6"	1.6"	5.5"	5.5"	5.5"	5.5"	5.5"
Saddle Height	0.50"	0.75"	0.83"	1.00"	0.50"	0.75"	0.83"	1.00"	0.52"/0.55"
Picatinny Slots	3	3	3	3	13	13	13	13	13
Weight	0.9 oz	0.9 oz	1.0 oz	1.0 oz	2.7 oz	2.7 oz	2.8 oz	2.8 oz	2.7 oz



Utilizes Locking Torx Screws and Square-shaped Integral Recoil Stops for a Secure Zero Hold



Rail Slots Index Perfectly with Receiver Slots



Scalloped Picatinny Slots for Snag Free Accessory Mounting